


1054 Countersunk head A2-A2, Inox, Stainless rivet (IIF), blind rivet, pop rivet

DIN: 7337B
DIN EN ISO: 15984
Rivet body: Stainless steel (A2)
Mandrel: Stainless steel (A2)

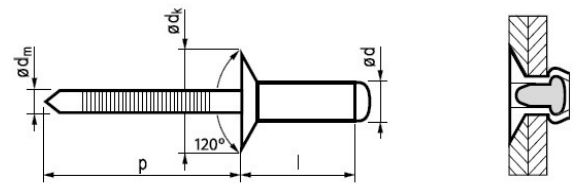

ϕd * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	ϕd_k mm	k mm	ϕd_m mm	p mm	Tensile Newton	Shear Newton	Description
3,2 [+0,08/-0,10] * ϕ 3,3	6,0	1,5-2,5	1054-3206	6,0 [+0/-0,4]	-	~2,00	≥ 27	2 500	1 800	3,2*6 Countersunk head A2/A2 (IIF) rivet
	8,0	2,5-4,5	1054-3208							3,2*8 Countersunk head A2/A2 (IIF) pop rivet
	10,0	4,5-6,5	1054-3210							3,2*10 Countersunk head A2/A2 (IIF) blind rivet
	12,0	6,5-8,5	1054-3212							3,2*12 SF Stainless /Stainless rivet
4,0 [+0,08/-0,15] * ϕ 4,1	6,0	~2,0	1054-4006	7,5 [+0/-0,5]	-	~2,50	≥ 27	3 800	3 100	4,0*6 Countersunk head A2/A2 (IIF) rivet
	8,0	2,0-4,0	1054-4008							4,0*8 Countersunk head A2/A2 (IIF) pop rivet
	10,0	4,0-6,0	1054-4010							4,0*10 Countersunk head A2/A2 (IIF) blind rivet
	12,0	6,0-8,0	1054-4012							4,0*12 SF Stainless /Stainless rivet
	15,0	9,0-11,0	1054-4015							4,0*15 Countersunk head A2/A2 (IIF) rivet
	16,0	10,0-12,0	1054-4016							4,0*16 Countersunk head A2/A2 (IIF) pop rivet
	18,0	12,0-14,0	1054-4018							4,0*18 Countersunk head A2/A2 (IIF) blind rivet
	20,0	14,0-16,0	1054-4020							4,0*20 Countersunk head A2/A2 (IIF) rivet
4,8 [+0,08/-0,15] * ϕ 4,9	8,0	1,5-3,0	1054-4808	9,0 [+0/-0,5]	-	~2,90	≥ 27	6 000	4 500	4,8*8 Countersunk head A2/A2 (IIF) pop rivet
	10,0	3,0-5,0	1054-4810							4,8*10 Countersunk head A2/A2 (IIF) blind rivet
	12,0	5,0-7,0	1054-4812							4,8*12 SF Stainless /Stainless rivet
	15,0	8,0-10,0	1054-4815							4,8*15 Countersunk head A2/A2 (IIF) rivet
	16,0	8,0-11,0	1054-4816							4,8*16 SF Stainless /Stainless rivet
	18,0	11,0-13,0	1054-4818							4,8*18 Countersunk head A2/A2 (IIF) pop rivet
	21,0	14,0-16,0	1054-4821							4,8*21 Countersunk head A2/A2 (IIF) blind rivet
	25,0	18,0-20,0	1054-4825							4,8*25 SF Stainless /Stainless rivet
	30,0	20,0-25,0	1054-4825							4,8*25 SF Stainless /Stainless rivet
5,0 [+0,08/-0,15] * ϕ 4,1	8,0	2,5-4,0	1054-5008	10,5 [+/-0,5]	-	~2,90	≥ 27	6 000	4 500	5,0*8 Countersunk head A2/A2 (IIF) rivet
	10,0	4,0-6,0	1054-5010							5,0*10 Countersunk head A2/A2 (IIF) pop rivet
	12,0	6,0-8,0	1054-5012							5,0*12 Countersunk head A2/A2 (IIF) blind rivet
	14,0	7,0-9,0	1054-5014							5,0*14 SF Stainless /Stainless rivet
	16,0	8,0-11,0	1054-5016							5,0*16 Countersunk head A2/A2 (IIF) rivet
	18,0	11,0-13,0	1054-5018							5,0*18 Countersunk head A2/A2 (IIF) pop rivet
	20,0	14,0-16,0	1054-5020							5,0*20 Countersunk head A2/A2 (IIF) blind rivet
	25,0	18,0-20,0	1054-5025							5,0*25 SF Stainless /Stainless rivet
	30,0	20,0-25,0	1054-5030							5,0*30 Countersunk head A2/A2 (IIF) rivet

Technical specifications:

- after riveting the stem/mandrel of rivetstem/mandrel of rivet is not fixed in the rivet body necessarily
- compared to Aluminum/steel rivet 1054 has higher strength
- stainless (it is not acid resistant)