


1101 Dome head Cooper-Steel rivet (RST), blind rivet, pop rivet

DIN: 7337A

DIN EN ISO: 16582

Rivet body: Copper

Mandrel: Steel, RoHS surface treatment

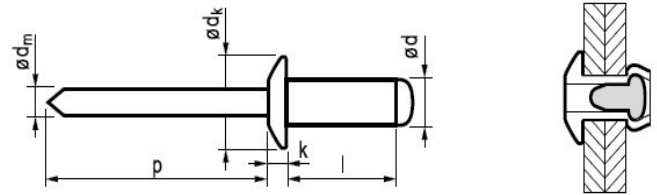

$\varnothing d$ * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	$\varnothing d_k$ mm	k mm	$\varnothing d_m$ mm	p mm	Tensile Newton	Shear Newton	Description
3,0 [+0,08/-0,10] *Ø 3,1	6,0	1,0-3,0	1101-3006	6,5 [+0/-0,7]	0,8 [+/- 0,2]	~1,75	≥27	700	600	3,0*6 Dome head Cu/St (RST) rivet
	8,0	3,0-5,0	1101-3008							3,0*8 Dome head Cu/St (RST) pop rivet
	10,0	5,0-7,0	1101-3010							3,0*10 Dome head Cu/St (RST) blind rivet
	12,0	7,0-9,0	1101-3012							3,0*12 Dome head Copper/Steel rivet
3,2 [+0,08/-0,10] *Ø 3,3	6,0	1,0-3,0	1101-3206	6,5 [+0/-0,7]	0,8 [+/- 0,2]	~1,95	≥27	800	700	3,2*6 Dome head Copper/Steel rivet
	8,0	3,0-5,0	1101-3208							3,2*8 Dome head Cu/St (RST) rivet
	10,0	5,0-7,0	1101-3210							3,2*10 Dome head Cu/St (RST) pop rivet
	12,0	7,0-9,0	1101-3212							3,2*12 Dome head Cu/St (RST) blind rivet
4,0 [+0,08/-0,15] *Ø 4,1	6,0	1,0-2,5	1101-4006	8,0 [+0/-1,0]	1,0 [+/- 0,3]	~2,10	≥27	1500	1000	4,0*6 Dome head Cu/St (RST) rivet
	8,0	2,5-4,5	1101-4008							4,0*8 Dome head Cu/St (RST) pop rivet
	10,0	4,5-6,5	1101-4010							4,0*10 Dome head Cu/St (RST) blind rivet
	12,0	6,5-8,5	1101-4012							4,0*12 Dome head Copper/Steel rivet
	14,0	8,5-10,5	1101-4014							4,0*14 Dome head Cu/St (RST) rivet
	16,0	10,5-12,5	1101-4016							4,0*16 Dome head Cu/St (RST) pop rivet
4,8 [+0,08/-0,15] *Ø 4,9	8,0	1,5-3,5	1101-4808	9,5 [+0/-1,0]	1,1 [+/- 0,3]	~2,70	≥27	2000	1500	4,8*8 Dome head Cu/St (RST) blind rivet
	10,0	3,5-5,5	1101-4810							4,8*10 Dome head Copper/Steel rivet
	12,0	5,5-7,5	1101-4812							4,8*12 Dome head Cu/St (RST) rivet
	14,0	7,5-9,5	1101-4814							4,8*14 Dome head Cu/St (RST) pop rivet
	16,0	9,5-11,5	1101-4816							4,8*16 Dome head Cu/St (RST) blind rivet

Technical specifications:

- after riveting the stem/mandrel of rivet is not fixed in the rivet body necessarily