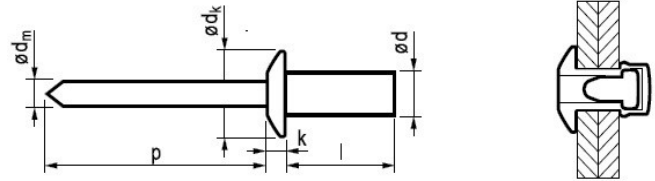


1201 Dome head AL-ST closed rivet, closed blind rivet, closed pop rivet

DIN EN ISO: 15975

Rivet body: Aluminum (AlMg5)
Mandrel: Steel, Phosphated

Ød * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	Ødk mm	k mm	Ødm mm	p mm	Tensile Newton	Shear Newton	Description
3,2 [+/-0,08] Ø 3,3	6,5	0,5-2,0	1201-3206	6,0 [+/-0,24]	≤1,4	~1,70	≥27	1 250	1 070	3,2*6 Dome head Aluminum/Steel closed rivet
	8,0	2,0-3,5	1201-3208							3,2*8 Dome head Al/St waterproof rivet
	9,5	3,5-5,0	1201-3209							3,2*9 Dome head Al/St closed pop rivet
	10,7	5,0-6,5	1201-3210							3,2*10 Dome head Al/St closed blind rivet
	12,7	6,5-8,0	1201-3212							3,2*12 Dome head Aluminum/Steel closed rivet
4,0 [+/-0,08] Ø 4,1	8,0	0,5-3,5	1201-4008	8,0 [+/-0,29]	≤1,7	~2,18	≥27	2 240	1 700	4,0*8 Dome head Al/St waterproof rivet
	9,5	3,5-4,5	1201-4009							4,0*9 Dome head Al/St closed pop rivet
	11,0	4,5-6,5	1201-4011							4,0*11 Dome head Al/St closed blind rivet
	12,7	6,5-8,0	1201-4012							4,0*12 Dome head Aluminum/Steel closed rivet
	15,0	8,0-10,5	1201-4015							4,0*15 Dome head Al/St waterproof rivet
4,8 [+/-0,08] Ø 4,9	8,0	1,0-3,0	1201-4808	9,5 [+/-0,29]	≤2,0	~2,63	≥27	3 100	2 200	4,8*8 Dome head Al/St closed pop rivet
	9,5	3,0-4,5	1201-4809							4,8*9 Dome head Al/St closed blind rivet
	11,0	4,5-6,0	1201-4811							4,8*11 Dome head Aluminum/Steel closed rivet
	12,5	6,0-7,5	1201-4812							4,8*12 Dome head Al/St waterproof rivet
	14,0	7,5-9,0	1201-4814							4,8*14 Dome head Al/St closed pop rivet
	16,0	9,0-11,0	1201-4816							4,8*16 Dome head Al/St closed blind rivet
	18,0	11,0-13,0	1201-4818							4,8*18 Dome head Aluminum/Steel closed rivet
	21,0	13,0-16,0	1201-4821							4,8*21 Dome head Al/St waterproof rivet
6,4 [+/-0,11] Ø 6,5	12,5	1,5-6,0	1201-6412	12,7 [+/-0,35]	≤2,5	~3,70	≥31	4 900	3 950	6,4*12 Dome head Al/St closed blind rivet
	16,0	6,0-8,0	1201-6416							6,4*16 Dome head Aluminum/Steel closed rivet

Technical specifications:

- after riveting the stem/mandrel of rivet fixed in the rivet body
- airtight and waterproof (extra safe if used with silicone)
- it is good till 35 bar of pressure
- it has stronger shear/tensile strength as the regular rivets

