



1211 Dome head AL-AL closed rivet, closed blind rivet, closed pop rivet

Rivet body: Aluminum (Al99,5)
Mandrel: Aluminum

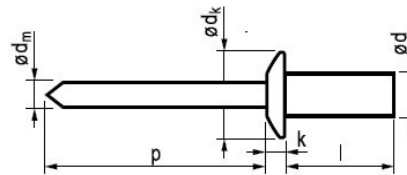

Ød * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	Ødk mm	k mm	Ødm mm	p mm	Tensile Newton	Shear Newton	Description
3,2 [+/-0,08] Ø 3,3	8,0	0,5-3,5	1211-3208	6,0 [+/-0,24]	≤1,4	~1,80	≥27	490	450	3,2*8 Dome head Alu/Alu closed rivet
	9,5	3,5-5,5	1211-3209							3,2*9 Dome head Al/Al waterproof rivet
4,0 [+/-0,08] Ø 4,1	9,5	0,5-5,0	1211-4009	8,0 [+/-0,29]	≤1,7	~2,2	≥27	820	580	4,0*9 DF Aluminum/Aluminum closed pop rivet
	12,5	5,0-8,0	1211-4012							4,0*12 Dome head Al/Al closed blind rivet
4,8 [+/-0,08] Ø 4,9	9,5	1,0-4,5	1211-4809	9,5 [+/-0,29]	≤2,0	~2,65	≥27	1120	900	4,8*9 Dome head Alu/Alu closed rivet
	11,5	4,5-6,5	1211-4811							4,8*11 Dome head Al/Al waterproof rivet
	14,5	6,5-9,5	1211-4814							4,8*14 DF Aluminum/Aluminum closed pop rivet
	18,0	9,5-13,0	1211-4818							4,8*18 Dome head Al/Al closed blind rivet

Technical specifications:

- after riveting the stem/mandrel of rivet fixed in the rivet body
- airtight and waterproof (extra safe if used with silicone)
- it is good till 35 bar of pressure
- thanks to Al stem/mandrel there will be no rust