



1241 Dome head ST-ST closed rivet, closed blind rivet, closed pop rivet

DIN EN ISO: 15976

Rivet body: Steel, RoHS surface treatment

Mandrel: Steel, RoHS surface treatment

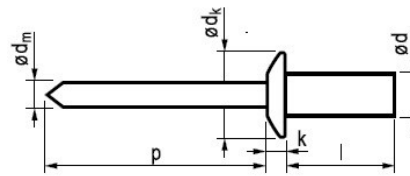

Ød * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	Ødk mm	k mm	Ødm mm	p mm	Tensile Newton	Shear Newton	Description						
3,2 [+0,08/-0,1] Ø 3,3	6,0	0,5-1,5	1241-3206	6,0 [+/-0,24]	1,0 [+/-0,3]	~1,90	≥27	2200	1600	3,2'6 Dome head Steel/Steel closed rivet						
	8,0	1,5-3,0	1241-3208							3,2'8 Dome head St/St waterproof rivet						
	9,5	3,0-5,0	1241-3209							3,2'9 Dome head St/St closed pop rivet						
	12,0	5,0-7,0	1241-3212							3,2'12 Dome head St/St closed blind rivet						
4,0 [+0,08/-0,1] Ø 4,1	6,0	0,5-1,5	1241-4006	8,0 [+/-0,29]	1,4 [+/-0,3]	~2,3	≥27	2 500	2 300	4,0'6 Dome head St/St waterproof rivet						
	8,0	1,5-3,0	1241-4008							4,0'8 Dome head St/St closed pop rivet						
	10,0	3,0-5,0	1241-4010							4,0'10 Dome head St/St closed blind rivet						
	12,0	5,0-6,5	1241-4012							4,0'12 Dome head Steel/Steel closed rivet						
	15,0	6,5-10,5	1241-4015							4,0'15 Dome head Steel/Steel closed rivet						
										4,0'15 Dome head St/St waterproof rivet						
4,8 [+0,08/-0,1] Ø 4,9	8,0	1,0-3,0	1241-4808	9,5 [+/-0,29]	1,7 [+/-0,3]	~2,9	≥27	3800	2900	4,8'8 Dome head St/St closed pop rivet						
	9,5	3,0-5,0	1241-4809							4,8'9 Dome head St/St closed blind rivet						
	12,0	5,0-6,5	1241-4812							4,8'12 Dome head Steel/Steel closed rivet						
	16,0	6,5-10,5	1241-4816							4,8'16 Dome head St/St waterproof rivet						

Technical specifications:

- after riveting the stem/mandrel of rivet fixed in the rivet body
- airtight and waterproof (extra safe if used with silicone)
- it is good till 35 bar of pressure
- it has stronger shear/tensile strength as the regular rivets