


23MxxCGxx Flat head closed steel knurled rivet nut (pop nut)

Material: Steel, RoHS surface treatment

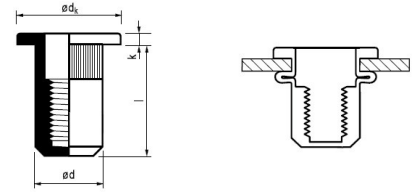

$\varnothing d$ Drill hole mm	L: length (mm) +0,1/-0,6	Grip range mm	Part no.	$\varnothing dk$ mm	k mm	$\varnothing d$ [+0/- 0,12] mm	Torque (Nm)	Tensile Newton	Shear Newton	Description
M4 $\varnothing 6,0$	15,5	0,3-3,0	23M04CG30	9,0 [+0/-0,5]	$\leq 1,1$	5,9	4,5	7 840	1 660	Flat head closed M04 rivet nut
M5 $\varnothing 7,0$	18,0	0,3-3,0	23M05CG30	10,0 [+0/-0,5]	$\leq 1,1$	6,9	6,0	11 070	2 760	Flat head closed end M05 pop nut
M6 $\varnothing 9,0$	20,5	0,5-3,0	23M06CG30	12,0 [+0/-0,5]	$\leq 1,6$	8,9	20,0	17 640	3 430	Flat head closed M06 pop nut
M8 $\varnothing 11,0$	25,0	0,5-3,0	23M08CG30	15,0 [+0/-0,5]	$\leq 1,6$	10,9	29,0	27 440	4 410	Flat head closed end M08 rivet nut

Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet (timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet
- closed rivet nut