


23MxxVGxx Countersunk head closed steel knurled rivet nut (pop nut)

Material: Steel, RoHS surface treatment

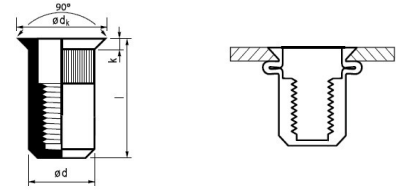

ϕd * Drill hole mm	L: length (mm) +0,5/-0	Grip range mm	Part no.	ϕdk mm	k mm	ϕd l+0/- 0,12l mm	Torque [Nm]	Tensile Newton	Shear Newton	Description
M4 * ϕ 6,0	17,5	2,0-3,5	23M04VG35	9,0 l+0,3/- 0,7	$\leq 1,7$	5,9	4	7 840	2 210	Countersunk head closed M04 rivet nut
M5 * ϕ 7,0	20,5	2,0-4,0	23M05VG40	10,0 l+0,3/- 0,7	$\leq 1,7$	6,9	5	11 780	2 320	Countersunk head closed end M05 rivet nut
M6 * ϕ 9,0	23,5	2,0-4,5	23M06VG45	12,0 l+0,3/- 0,7	$\leq 1,7$	8,9	16	16 660	3 660	Countersunk head closed M06 pop nut
M8 * ϕ 11,0	28,0	2,0-4,5	23M08VG45	14,0 l+0,3/- 0,7	$\leq 1,7$	10,9	18	30 840	4 720	Countersunk head closed end M08 pop nut

Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet (timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet
- closed rivet nut