


## 23MxxV0xx Countersunk head open steel knurled rivet nut (pop nut)

Material: Steel, RoHS surface treatment

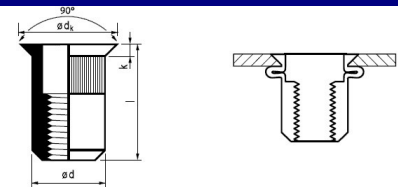

$\varnothing d$ Drill hole mm	l: length (mm) +0,5/-0	Grip range mm	Part no.	$\varnothing dk$ mm	k mm	$\varnothing d$ [+0/- 0,12] mm	Torque [Nm]	Tensile Newton	Shear Newton	Description
M4 $\varnothing 6,0$	11,5	2,0-3,5	23M04V035	9,0 [+0,3/- 0,7]	$\leq 1,7$	5,9	4	7 840	2 210	Countersunk head open M04 rivet nut
M5 $\varnothing 7,0$	13,5	2,0-4,0	23M05V040	10,0 [+0,3/- 0,7]	$\leq 1,7$	6,9	5	11 780	2 320	Countersunk head open M05 pop nut
M6 $\varnothing 9,0$	16,0	2,0-4,5	23M06V045	12,0 [+0,3/- 0,7]	$\leq 1,7$	8,9	16	16 660	3 660	Countersunk head open M06 rivet nut
M8 $\varnothing 11,0$	19,0	2,0-4,5	23M08V045	15,0 [+0,3/- 0,7]	$\leq 1,7$	10,9	18	30 840	4 720	Countersunk head open M08 pop nut
M10 $\varnothing 12,0$	21,0	2,0-4,5	23M10V045	14,7 [+0,3/- 0,7]	$\leq 1,7$	11,9	28	34 300	5 050	Countersunk head open M10 rivet nut
M10 $\varnothing 13,0$	21,0	2,0-4,5	23M10V045_d13	15,7 [+0,3/- 0,7]	$\leq 1,7$	12,9	30	37 000	5 450	Countersunk head open M10 pop nut
M12 $\varnothing 16,0$	24,5	2,0-4,5	23M12V045	19 [+0,3/- 0,7]	$\leq 1,9$	15,9	28	34 300	5 050	Countersunk head open M12 rivet nut

### Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet ( timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet