


24MxxC0xx Flat head open stainless steel knurled rivet nut (pop nut)

Material: Stainless steel

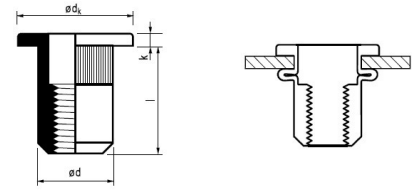

ϕd * Drill hole mm	L: length (mm)	Grip range mm	Part no.	ϕd_k mm [+0/-0,5]	k mm	ϕd [+0/- 0,12] mm	Torque (Nm)	Tensile Newton	Shear Newton	Description
M4 * ϕ 6,0	10,0 [+0/-1,3]	0,3-2,5	24M04C025	9	$\leq 1,1$	5,9	7,0	6 860	2 640	Flat head knurled Inox M04 rivet nut
	11,5 [+0/-1,3]	2,5-4,0	24M04C040				7,0	6 860	2 640	Flat head knurled A2 M04 pop nut
M5 * ϕ 7,0	12,0 [+0/-1,3]	0,3-3,0	24M05C030	10	$\leq 1,1$	6,9	10,0	11 760	2 940	Flat head Inox M05 rivet nut
	13,5 [+0/-1,3]	3,1-4,0	24M05C040				12,0	11 760	3 920	Flat head A2 M05 rivet nut
M6 * ϕ 9,0	14,5 [+0/-1,8]	0,5-3,0	24M06C030	12	$\leq 1,6$	8,9	20,0	18 620	4 900	Flat head Stainless M06 rivet nut
	16,0 [+0/-1,8]	3,1-4,5	24M06C045				22,0	20 580	5 630	Flat head knurled A2 M06 pop nut
M8 * ϕ 11,0	16,0 [+0/-1,8]	0,5-3,0	24M08C030	15	$\leq 1,6$	10,9	28,0	24 500	6 860	Flat head knurled Inox M08 rivet nut
	18,5 [+0/-1,8]	3,1-5,5	24M08C055				29,0	26 460	6 860	Flat head knurled stainless M08 rivet nut
M10 * ϕ 13,0	17,0 [+0/-2,3]	0,5-3,0	24M10C030	16	$\leq 2,1$	12,9	38,0	29 400	7 840	Flat head Inox M10 rivet nut
	20,0 [+0/-2,3]	3,1-5,5	24M10C055				39,0	35 280	7 840	Flat head A2 M10 pop nut

Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet (timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet
- stainless