


## 24MxxV0xx Countersunk head open stainless steel knurled rivet nut (pop nut)

Material: Stainless steel

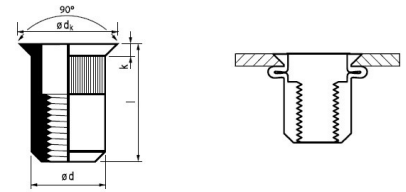

$\varnothing d$ * Drill hole mm	l: length (mm) +0,5/-0	Grip range mm	Part no.	$\varnothing d_k$ mm	k mm	$\varnothing d$ [+0/- 0,12] mm	Torque (Nm)	Tensile Newton	Shear Newton	Description
M4 * $\varnothing$ 6,0	11,5	2,0-3,5	24M04V035	9,0 [+0/-0,5]	$\leq 1,8$	5,9	9,0	10 130	3 720	Countersunk head Inox M04 rivet nut
M5 * $\varnothing$ 7,0	13,5	2,0-4,0	24M05V040	10,0 [+1/-1,5]	$\leq 1,8$	6,9	10,5	12 250	4 020	Countersunk head A2 M05 rivet nut
M6 * $\varnothing$ 9,0	16,0	2,0-4,5	24M06V045	12,0 [+1/-1,5]	$\leq 1,8$	8,9	21,0	20 580	5 560	Countersunk head Inox M06 rivet nut
M8 * $\varnothing$ 11,0	19,0	2,0-4,5	24M08V045	14,0 [+1/-1,5]	$\leq 1,8$	10,9	31,0	28 070	7 640	Countersunk head A2 M08 rivet nut
M10 * $\varnothing$ 13,0	21,0	2,0-4,5	24M10V045	16,0 [+3/-3,5]	$\leq 1,8$	12,9	32,0	32 790	8 110	Countersunk head Inox M10 rivet nut

### Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet ( timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet
- stainless