

Chobert® 1143



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.


English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Brass*	Laiton*	Kupfer-Zink Legierung*	Ottone*	Latón*
Electro tin plated**	Étamage électrolytique**	verzinkt**	Stagnato**	Estañado electrolítico**

*: BS EN 12166 CW 508L DIN 17660 CuZn37

** Avdel recommends tin plated parts are installed within nine months from the date they were produced / Avdel conseille d'utiliser les pièces en laiton étamé sous un délai de 9 mois après la date de production / Avdel empfiehlt, verzinkte Nieten innerhalb 9 Monaten nach Produktionsdatum zu verarbeiten / Avdel raccomanda di utilizzare i prodotti stagnati entro nove mesi a decorrere dalla data di fabbricazione / Avdel recomienda utilizar sus piezas estañadas antes de nueve meses desde la fecha de su fabricación.

Option:

For brightened Brass finish replace 01143 with 01141 / Pour finition brillante remplacer la série 01143 par 01141 / Für Oberfläche blank ersetzen Sie 01143 durch 01141 / Per finitura brillante sostituire 01143 con 01141 / Con acabado brillante cambiar 01143 por 01141

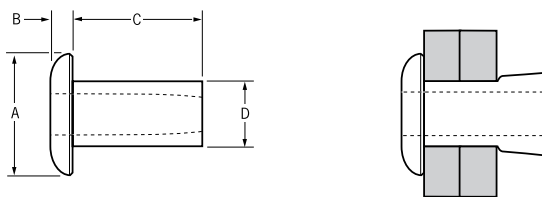

Ø					A	B	C	D		Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin/ Rivetti per carica- tore / Uds./carga	Part No/ref
nom.	min.	max.	min.	max.	± 0,4	max.	max.	max.	kN ¹⁾	± 1	
2.4 (3/32")	0.00	1.57	2.49	2.55	4.0	1.0	3.2	2.48	0.6	73	01143-00304
	1.57	3.17					4.8			52	01143-00306
	3.17	4.75					6.4			41	01143-00308
	4.75	6.35					8.0			33	01143-00310
	6.35	7.92					9.6			28	01143-00312
3.2 (1/8")	0.00	1.57	3.28	3.34	5.2	1.2	3.2	3.25	1.1	71	01143-00404
	1.57	3.17					4.8			51	01143-00406
	3.17	4.75					6.4			39	01143-00408
	4.75	6.35					8.0			32	01143-00410
4.0 (5/32")	1.57	3.17	4.09	4.16	6.2	1.5	4.8	4.06	1.8	47	01143-00506
	3.17	4.75					6.4			38	01143-00508
	4.75	6.35					8.0			31	01143-00510
	6.35	7.92					9.6			27	01143-00512
	7.92	9.52					11.1			23	01143-00514
	9.52	11.10					12.7			21	01143-00516
4.8 (3/16")	1.57	3.17	4.85	4.93	8.6	1.8	5.6	4.82	2.5	38	01143-00607
	3.17	4.75					7.2			33	01143-00609
	4.75	6.35					8.8			28	01143-00611
	6.35	7.92					10.4			24	01143-00613
	7.92	9.52					12.0			21	01143-00615
	9.52	11.10					13.5			19	01143-00617

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



Avdel®

An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Chobert® is a trademark of Avdel UK Limited

04b.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.