


1051 Dome head A2-A2 Inox, Stainless rivet (IIT), blind rivet, pop rivet

DIN: 7337A
DIN EN ISO: 15983
Rivet body: Stainless steel (A2)
Mandrel: Stainless steel (A2)

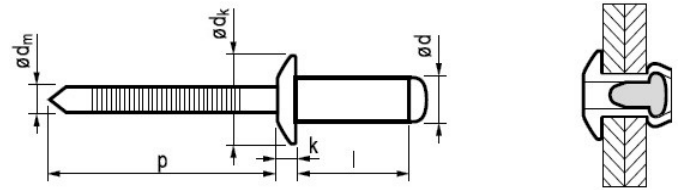

Ød * Drill hole mm	l: length (mm) +1/-0,2	Grip range mm	Part no.	Ødk mm	k mm	Ødm mm	p mm	Tensile Newton	Shear Newton	Description
3,0 [+0,08/-0,10] Ø 3,1	6,0	1,5-2,5	1051-3006	6,5 [+0/-0,7]	0,8 [+/-0,2]	~1,90	≥27	2 000	1 600	3,0*6 Dome head A2/A2 (IIT) rivet
	8,0	2,5-4,5	1051-3008							3,0*8 Dome head A2/A2 (IIT) pop rivet
	10,0	4,5-6,5	1051-3010							3,0*10 Dome head A2/A2 (IIT) blind rivet
	12,0	6,5-8,5	1051-3012							3,0*12 D Stainless /Stainless rivet
3,2 [+0,08/-0,10] Ø 3,3	4,0	~1,5	1051-3204	6,5 [+0/-0,7]	0,8 [+/-0,2]	~2,00	≥27	2 500	1 800	3,2*4 Dome head A2/A2 (IIT) rivet
	6,0	1,5-2,5	1051-3206							3,2*6 Dome head A2/A2 (IIT) pop rivet
	8,0	2,5-4,5	1051-3208							3,2*8 Dome head A2/A2 (IIT) blind rivet
	10,0	4,5-6,5	1051-3210							3,2*10 D Stainless /Stainless rivet
	12,0	6,5-8,5	1051-3212							3,2*12 Dome head A2/A2 (IIT) rivet
	15,0	8,5-12,0	1051-3215							3,2*15 Dome head A2/A2 (IIT) pop rivet
	18,0	12,0-15,0	1051-3218							3,2*18 Dome head A2/A2 (IIT) blind rivet
4,0 [+0,08/-0,15] Ø 4,1	6,0	~2,0	1051-4006	8,0 [+0/-1,0]	1,0 [+/-0,3]	~2,50	≥27	3 800	3 100	4,0*6 D Stainless /Stainless rivet
	8,0	2,0-4,0	1051-4008							4,0*8 Dome head A2/A2 (IIT) rivet
	10,0	4,0-6,0	1051-4010							4,0*10 Dome head A2/A2 (IIT) pop rivet
	12,0	6,0-8,0	1051-4012							4,0*13 Dome head A2/A2 (IIT) blind rivet
	13,0	7,0-9,0	1051-4013							4,0*16 D Stainless /Stainless rivet
	16,0	10,0-12,0	1051-4016							4,0*18 Dome head A2/A2 (IIT) rivet
	18,0	12,0-14,0	1051-4018							4,0*20 Dome head A2/A2 (IIT) pop rivet
	20,0	14,0-16,0	1051-4020							4,8*8 Dome head A2/A2 (IIT) blind rivet
4,8 [+0,08/-0,15] Ø 4,9	8,0	1,5-3,0	1051-4808	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,90	≥27	6 000	4 500	4,8*8 Dome head A2/A2 (IIT) blind rivet
	10,0	3,0-5,0	1051-4810							4,8*10 D Stainless /Stainless rivet
	12,0	5,0-7,0	1051-4812							4,8*12 Dome head A2/A2 (IIT) rivet
	14,0	7,0-9,0	1051-4814							4,8*14 Dome head A2/A2 (IIT) pop rivet
	16,0	9,0-11,0	1051-4816							4,8*16 Dome head A2/A2 (IIT) blind rivet
	18,0	11,0-13,0	1051-4818							4,8*18 D Stainless /Stainless rivet
	20,0	13,0-15,0	1051-4820							4,8*20 Dome head A2/A2 (IIT) rivet
5,0 [+0,08/-0,15]/ Ø 5,1	8,0	1,5-3,0	1051-5008	9,5 [+0/-1,0]	1,1 [+/-0,3]	~2,90	≥27	6 500	5 000	5,0*8 Dome head A2/A2 (IIT) pop rivet
	10,0	3,0-5,0	1051-5010							5,0*10 Dome head A2/A2 (IIT) blind rivet
	12,0	5,0-7,0	1051-5012							5,0*12 D Stainless /Stainless rivet
	16,0	9,0-11,0	1051-5016							5,0*16 Dome head A2/A2 (IIT) rivet
6,0 [+0,08/-0,15] Ø 6,1	12,0	4,0-6,0	1051-6012	12,0 [+0/-1,5]	1,5 [+/-0,4]	~3,60	≥31	8 830	6 500	6,0*12 Dome head A2/A2 (IIT) pop rivet
	15,0	6,0-9,0	1051-6015							6,0*15 Dome head A2/A2 (IIT) blind rivet
	18,0	9,0-12,0	1051-6018							6,0*18 D Stainless /Stainless rivet
	20,0	11,0-14,0	1051-6020							6,0*20 Dome head A2/A2 (IIT) rivet
6,4 [+0,08/-0,15] Ø 6,5	12,0	4,5-6,5	1051-6412	13,0 [+0/-1,5]	2,1 [+/-0,4]	~3,85	≥31	8 850	6 500	6,4*12 Dome head A2/A2 (IIT) pop rivet
	15,0	6,5-9,5	1051-6415							6,4*15 Dome head A2/A2 (IIT) blind rivet
	18,0	9,5-12,5	1051-6418							6,4*18 D Stainless /Stainless rivet
	20,0	11,5-14,5	1051-6420							6,4*20 Dome head A2/A2 (IIT) rivet
	25,0	17,0-20,0	1051-6425							6,4*25 Dome head A2/A2 (IIT) pop rivet

Technical specifications:

- after riveting the stem/mandrel of rivet is not fixed in the rivet body necessarily
- compared to Aluminum/steel rivet 1051 has higher strength
- stainless (it is not acid resistant)