


39101 Small CSK head open steel half hexagonal rivet nut

Material: Steel, RoHS surface treatment

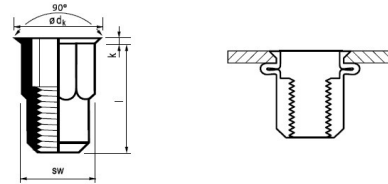

Ød *Side width mm	l: length (mm) +0,6/-0,6	Grip range mm	Part no.	Ødk mm	k mm	Ød l+0/- 0,12l mm	Torque [Nm]	Tensile Newton	Shear Newton	Description
M4 *SW1 6,1	10,6	0,5-2,0	39101-24025	7,2 l+0,6/- 0,6l	≤0,75	6,0	12,0	8 240	2 950	Reduced head ST hexagonal M4 rivet nut
M5 *SW1 7,1	12,7	0,5-3,0	39101-25030	8,5 l+0,6/- 0,6l	≤0,84	7,0	14,0	11 760	2 840	Small head hexert ST open M5 pop nut
M6 *SW1 9,1	15,0	0,5-3,0	39101-26030	11,0 l+0,6/- 0,6l	≤0,98	9,0	16,9	21 560	3 820	Reduced head hexagonal body Steel open M6 rivet nut
M6 *SW1 9,1	17,8	3,0-5,5	39101-26055	11,0 l+0,6/- 0,6l	≤0,98	9,0	16,9	24 500	3 920	Small CSK head hexert ST open M6 pop nut
M8 *SW1 11,1	16,9	0,5-3,0	39101-28030	13,6 l+0,6/- 0,6l	≤1,14	13,0	39,0	37 040	5 010	Reduced head ST hexagonal M8 rivet nut
M10 *SW1 13,1	20,5	1,0-3,5	39101-20035	15,8 l+0,6/- 0,6l	≤1,14	15,0	45,0	60 000	6 800	Reduced head hexagonal body Steel open M10 rivet nut

Technical specifications:

- can be set from one side, where the rear of the material and the inside of the object are inaccessible
- it is suitable for riveting of sheets and you get useable thread also
- not necessary to cut a thread or to weld a nut to the sheet (timesaving)
- material of sheet will not be deformed/ discolored
- suitable for thin sheet