


Avinox® BE61

For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Stainless steel* Polished	Corps: Inox* Poli	Hülse: Edelstahl* Blank	Corpo: Acciaio inox* Lucido	Cuerpo: Acero inoxidable* Pulido
Stem: Stainless steel** Natural	Tige: Inox** Brut	Dorn: Edelstahl** Unbehandelt	Gambo: Acciaio inox** Nessuna finitura	Vástago: Acero inoxidable** Natural

*: BS 3111 394S17, Werkstoff 1.4567
 **: BS 3111 321S31, AISI 321, Werkstoff 1.4541 / AISI 304, Werkstoff 1.4301

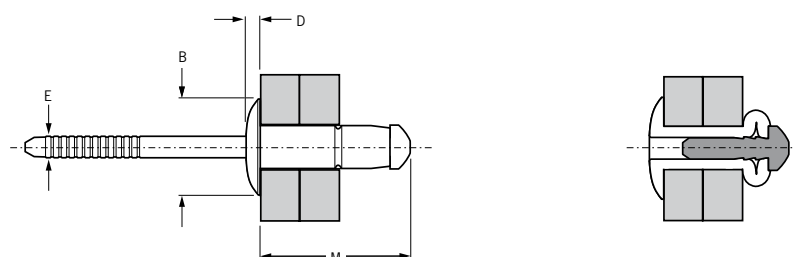

ø					M	B	D	E			Part No/ref
nom.	min.	max.	min.	max.	max.	max.	max.	max.	kN ¹⁾	kN ¹⁾	
3.2 (1/8")	1.0	3.0	3.3	3.4	9.0	6.6	1.1	2.1	1.6	2.0	OBE61-00408
	3.0	5.0			11.5						OBE61-00411
	5.0	7.0			14.1						OBE61-00414
4.0 (5/32")	1.0	3.0	4.1	4.3	10.3	8.0	1.5	2.6	2.8	4.0	OBE61-00509
	3.0	5.0			12.9						OBE61-00512
	5.0	7.0			15.6						OBE61-00516
4.8 (3/16")	1.5	3.5	4.9	5.1	12.8	9.6	1.5	3.2	3.9	5.0	OBE61-00611
	3.5	6.0			15.4						OBE61-00614
	6.0	8.5			18.4						OBE61-00618

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Avinox® is a trademark of Avdel UK Limited

09.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.